



#5

2681

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: ANDREW PHILIP BROWN

For: WIRELESS HEADSET-BASED COMMUNICATION

Serial No.: 10/065,895

Examiner:

Filed: November 27, 2002

Group Art Unit: 2681

Docket No.: 71522-3

RECEIVED

JAN 17 2003

Technology Center 2600

CERTIFICATE OF MAILING/TRANSMISSION (37 CFR 1.8(a))

I hereby certify that this correspondence is, on the date shown below, being:

☒ deposited with the United States Postal Service with sufficient postage as first class mail, in an envelope addressed to the Commissioner for Patents, Washington, D.C. 20231

☐ transmitted by facsimile to the Patent and Trademark Office to Examiner _____ at _____

Signature: Andrea R. Wolters

Date: January 10, 2003

Andrea R. Wolters
(type or print name of person certifying)

Commissioner for Patents
Washington, D.C. 20231

Sir:

TRANSMITTAL OF PRIORITY DOCUMENT

Applicant submits herewith a certified copy of the priority document (United Kingdom Application No. 0128473.6) relied upon by Applicant in the captioned application, pursuant to 37 C.F.R. § 1.55(a)(2).

Please direct any questions relating to this matter to the undersigned attorney for Applicant.

Respectfully submitted,

Andrew Philip Brown

Date: 12 January 2003

By: Joel E. Bair
Joel E. Bair, Reg. No. 33,356
McGARRY BAIR PC
171 Monroe Avenue, NW, Suite 600
Grand Rapids, Michigan 49503
616-742-3500

G0083920

This Page Blank (uspto)



INVESTOR IN PEOPLE



RECEIVED

JAN 17 2003

Technology Center 2600

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 4 December 2002

CERTIFIED COPY OF
PRIORITY DOCUMENT

This Page Blank (uspto)



7/77

**Statement of inventorship and of
right to grant of a patent**

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

| | |
|--|--|
| 1. Your reference | 01.0111-Sen/P045/GB/AJW |
| 2. Patent application number (if you know it) | 0128473.6 |
| 3. Full name of the or of each applicant | Sendo International Limited 1601-3 Kinwick Center 32 Hollywood Road, Central, Hong Kong |
| 4. Title of the invention | WIRELESS HEADSET-BASED COMMUNICATION |
| 5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent | The applicant derives the right to be granted a patent by virtue of the inventor's employment agreement with Sendo Ltd. in Small Heath Business Park, Birmingham, England - a sister company of the applicant - in conjunction with a written agreement transferring all IP rights from Sendo Ltd. to the applicant. Sendo International Ltd. |
| 6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c)) | |
| 7. | I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to. Signature  Date 28 November 2001 |
| 8. Name and daytime telephone number of person to contact in the United Kingdom | Antony Wray 01256 816233 |

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Andrew Philip BROWN

'The Firs'
Windmill Hill
Temple Grafton
Warwickshire
B50 4LH

Patents ADP number (If you know it) 8289399001

Patents ADP number (If you know it):

Reminder

Have you signed the form?

Patents ADP number (If you know it):

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
Office28NOV01 E678044-1 C63975
P01/7700 0.00-0128473.6

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

THE PATENT OFFICE
A
28 NOV 2001
RECEIVED BY FAX

1. Your reference

01.0111-Sen/P045/GB/AJW

2. Patent application number

(The Patent Office will fill in this part)

0128473.6

28 NOV 2001

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Sendo International Limited
1601-3 Kinwick Center
32 Hollywood Road, Central, Hong Kong

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Hong Kong

8202135001

4. Title of the invention

WIRELESS HEADSET-BASED
COMMUNICATION

5. Name of your agent (if you have one)

Antony Wray

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

INETIP
121 Blackberry Lane
Four Marks, Alton
Hampshire GU34 5DJOPTIMUS,
Grove House,
Lutyens Close,
Chineham Court,
BASINGSTOKE,
RG24 8AGM-JONES
GROF

08406894001

Patents ADP number (if you know it)

8225930001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

Yes

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

0022605 28-Nov-01 03:56

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

16 ✓

Claim(s)

4 ✓

Abstract

1 ✓

Drawing(s)

3 ✓ *John*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)Request for preliminary examination and search (*Patents Form 9/77*)Request for substantive examination (*Patents Form 10/77*)Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

A. J. Wray

28 November 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

Antony Wray

01256 816233

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

P045/GB/Sen/Brown

- 1 -

WIRELESS HEADSET-BASED COMMUNICATION**Field of the Invention**

5

The present invention relates to a wireless headset-based communication arrangement, in particular to an arrangement where a user uses a wireless headset with a subscriber communication unit to communicate with other
10 subscriber units.

Background of the Invention

15 In the field of this invention it is known for wireless headsets to be used with communication devices, such as cordless telephones, mobile radios or cellular subscriber units. Wireless headsets are used to provide hands-free functionality of the communication device, and can be
20 considered as a wireless extension of the device's communication capability.

When used in such a hands-free mode of operation, the communication device routes the received, demodulated and
25 decoded signal to a short-range transmitter, instead of a microphone. The radio transmission from the short-range transmitter is picked up from a wireless receiver in the headset, where it is processed and passed to an audio enunciator in the headset to be relayed to the headset
30 user.

P045/GB/Sen/Brown

- 2 -

In an alternative application of wireless headsets, it is also known for wireless communications to be set up between groups of people, where each person in the group uses a wireless headset. Such group communication is
5 beneficial when the users are highly mobile, and communication on the 'shared' channel is not needed to be secure. Furthermore, such wireless headset use in group communications is sometimes used when normal one-to-one conversation is not practical. Further applications of
10 such group-communication wireless headset arrangements would include sporting events, where the groups are members of a team, or the referees.

However, the above two applications for using wireless
15 headsets are very distinct, and have so far been addressed with individual stand-alone solutions. The inventor of the present invention has recognised this fact and that no single headset, presently available, is capable of facilitating both of the above functions.
20 Furthermore, the inventor of the present invention has recognised scenarios where a multi-purpose wireless headset would be an advantage.

A need therefore exists for an improved wireless headset,
25 wherein the abovementioned disadvantages may be alleviated.

Statement of Invention

30

P045/GB/Sen/Brown

- 3 -

In accordance with a first aspect of the present invention, there is provided a wireless headset-based communication arrangement, as claimed in claim 1.

- 5 In accordance with a second aspect of the present invention, there is provided a wireless headset, as claimed in claim 9.

- 10 In accordance with a third aspect of the present invention, there is provided a communication device, as claimed in claim 10.

- 15 In accordance with a fourth aspect of the present invention, there is provided a wireless headset, as claimed in claim 11.

Further aspects of the invention are as claimed in the dependent claims.

- 20 In summary, the present invention proposes inter-alia, to facilitate direct communication, using a short-range wireless communication link between a first wireless headset and a second wireless headset or associated subscriber unit. The short-range link is preferably used
25 as an alternative to a normal communication link when the second wireless headset or associated subscriber unit are detected as being spatially near the first wireless headset or its associated subscriber unit. In this manner, a wireless headset is able to provide two modes
30 of operation, a first being "hands-free" communication with its associated subscriber unit, and a second mode

P045/GB/Sen/Brown

- 4 -

being direct (inter-headset) communication with other wireless headsets (or subscriber units).

5 Brief Description of the Drawings

Exemplary embodiments of the present invention will now be described, with reference to the accompanying drawings, in which:

10

FIG. 1 shows a block diagram of a subscriber unit and associated wireless headset arrangement adapted to support the inventive concepts of the preferred embodiments of the present invention;

15

FIG. 2 illustrates a subscriber unit/wireless headset communication arrangement, in accordance with a first preferred embodiment of the present invention; and

20

FIG. 3 illustrates a communication unit/wireless headset communication arrangement, in accordance with an alternative embodiment of the present invention.

25 Description of Preferred Embodiments

The preferred embodiment of the present invention is described with reference to a portable cellular phone/wireless headset arrangement. However, it is
30 within the contemplation of the present invention that the inventive concepts described herein are equally

P045/GB/Sen/Brown

- 5 -

applicable to any other audio, video or image communication device, such as a personal data assistant (PDA), a portable or mobile radio, a laptop computer or a wirelessly networked Personal Computer (PC), where an
5 optional short range communication link would be advantageous. It is envisaged that future wireless headset applications will not be limited to relaying audio communication, but will include relaying image or video signals to a screen attached to the headset, or to
10 a virtual screen positioned in view of the headset user.

Referring first to FIG. 1, there is shown a block diagram of a cellular subscriber unit 100 adapted to support the
15 inventive concepts of the preferred embodiments of the present invention. The subscriber unit 100 contains an antenna 102 preferably coupled to a duplex filter, antenna switch or circulator 104 that provides isolation between receiver and transmitter chains within the
20 subscriber unit 100.

The receiver chain, as known in the art, includes scanning receiver front-end circuitry 106 (effectively providing reception, filtering and intermediate or base-
25 band frequency conversion). The scanning front-end circuit 106 is serially coupled to a signal processing function 108. An output from the signal processing function 108 is provided to a suitable output device 110, which in accordance with the preferred embodiment of the
30 present invention is a radio frequency interface port for transmitting short-range signals to an associated

P045/GB/Sen/Brown

- 6 -

wireless headset. The radio frequency interface port 110 preferably includes a port driver 111.

In the preferred embodiment of the present invention, the scanning front-end circuit 106 and the signal processing function 108 have been adapted to distinguish between communication on the subscriber unit's usual wireless communication system, and a communication with a proximal communication unit/wireless headset on a short-range radio frequency (RF) link. Such a communication is described in greater detail with respect to FIG. 2.

The receiver chain also includes received signal strength indicator (RSSI) circuitry 112, which in turn is coupled to a controller 114 where the RSSI circuitry provides useful quality indicators on the received signal and the controller maintains overall subscriber unit control. The controller 114 is also coupled to the scanning receiver front-end circuitry 106 and the signal processing function 108 (generally realised by a digital signal processor (DSP)) for receiving a transmitted audio, video or image signal.

The controller 114 may therefore receive signal level information, bit error rate (BER) or frame erasure rate (FER) data from recovered information. The controller is also coupled to a memory device 116 that stores operating regimes, such as decoding/encoding functions and the like. In accordance with the preferred embodiment of the present invention, a proximal detection means has been incorporated, operably coupled to the processor 108

P045/GB/Sen/Brown

- 7 -

and/or controller 114, to detect when a wireless headset has moved into the spatial vicinity of the headset associated with the subscriber unit 100.

5 Upon detecting the spatial proximity of a second subscriber unit or its associated headset, the primary subscriber unit 100 or its associated headset is provided with an opportunity to communicate directly with the second subscriber unit or its associated headset using a
10 short range RF link. In this manner, the short-range communication link is used to supplement the standard communication of the subscriber unit, whilst minimising the impact on the usual communication resource and any generated interference.

15

A timer 118 is operably coupled to the controller 114 to control the timing of operations (including transmission or reception of time-dependent signals) within the cellular subscriber unit 100. The timer, together with
20 the port driver 111, processor 108 and/or controller 114, has also been adapted to control the switching of communications from a usual communication link, for example a GSM or 3rd generation cellular (3G) communication link to a more appropriate short range RF
25 link.

The wireless headset 130 associated with the subscriber unit 100 is preferably comprised of:

- (i) One (monaural) or two (bi-aural) earpieces 132;
- 30 (ii) A microphone 134;

P045/GB/Sen/Brown

- 8 -

(iii) RF transmit and receive elements 136 and control means for wireless (e.g. bluetooth) headsets; and, in some cases:

- (iv) A remote answer switch/button (not shown); and
- 5 (v) A second noise cancellation button (not shown).

As indicated, each wireless headset comprises RF transmitting and receiving elements, allowing two-way communications to at least one other device.

10 Furthermore, in an alternative embodiment of the present invention, the wireless headset includes detection means, in a similar manner to that described earlier with respect to the subscriber unit. Each wireless headset comprises a microprocessor to control communication etc,

15 as well as memory for storing application software etc. In accordance with the preferred embodiment of the present invention, a wireless headset(s) has been adapted with regard to the detection of signals destined for that headset, and how such received signals are controlled,

20 for example via the man machine interface (MMI) of the cellular phone or computer.

The preferred operation is now described in greater

25 detail with reference to FIG. 2, where an example of a wireless communication arrangement 200 is illustrated, in accordance with a preferred embodiment of the present invention. The arrangement 200 comprises a first communication device, which for the illustrated

30 embodiment is in the form of a subscriber unit 210, and an associated wireless headset 212. The subscriber unit

P045/GB/Sen/Brown

- 9 -

210 and the wireless headset 212 are operably coupled and capable of providing hands-free functionality to a user of the subscriber unit 210.

5 FIG. 2 further illustrates a second communication device 220, which for the illustrated embodiment is in the form of a second subscriber unit 220, and a second associated wireless headset 222. The second subscriber unit 220 and second wireless headset 222 are also capable of providing
10 hands-free functionality to a user of the second subscriber unit 220.

In particular, according to the present invention, the first subscriber unit 210 (or associated wireless headset
15 212) has been adapted to include a headset detection means, as described with regard to FIG. 1, capable of detecting the presence of the second wireless headset 222, when the second wireless headset 222 (or the second subscriber unit 220) is spatially near the first
20 communication device 210. In the context of the preferred embodiment of the present invention, it is envisaged that the detection means recognises, for example, when the second wireless headset 222 is within, say, ten metres of the first communication unit 210 or
25 its associated wireless headset 212.

In the alternative preferred embodiment, where the wireless headset 212 is provided with RF detection means that is capable of detecting the presence of the second
30 wireless headset 222, it is envisaged that the first wireless headset 212 informs its associated subscriber

P045/GB/Sen/Brown

- 10 -

unit 210 of the proximal wireless headset(s) or subscriber unit(s).

When the second wireless headset 222 is detected as being
5 within range 135 of the first subscriber unit 210 (or
first wireless headset 212), a user of the first
subscriber unit 210 may initiate wireless communication
between the first wireless headset 212 and the second
wireless headset 222. This provides a means for the user
10 of the first subscriber unit 210 to communicate with a
user of the second subscriber unit 220 by way of direct
short-range wireless communication between the wireless
headsets 212 and 222. It is further envisaged that such
short-range communication could be effected using simple
15 RF communication, perhaps initiating the use of pre-
stored messages stored within the respective headsets.

Preferably, each wireless headset has a substantially
unique identification (ID). For example, since each
20 headset is associated with a particular subscriber unit,
each headset may be configured to use the telephone
number of the respective subscriber unit as its ID. When
the subscriber unit 210 detects the presence of the
second wireless headset 222, it is envisaged that the
25 subscriber unit 210 may request the ID of the second
wireless headset 222, or the second wireless headset 222
may be configured to automatically or periodically
transmit its ID. The first subscriber unit 210 may then
use the second subscriber unit's ID in differentiating
30 communication between different headsets.

P045/GB/Sen/Brown

- 11 -

Where the ID is the telephone number of the second subscriber unit 220, the subscriber unit 210 may search through its phone book in order to identify the user of the second wireless headset 222.

5

Preferably the subscriber unit 210 retains a list of the wireless headsets within its range, such that when the user wants to communicate with a specific user of another headset they simply search through the list until they
10 find the required ID (or name if the number matches an entry in the phone book). On selecting the required ID or name, the subscriber unit 210 sends an instruction to its respective headset 212, instructing the headset to initiate communication 130 with the second wireless
15 headset 222 having the selected ID. On receipt of this instruction, the first wireless headset 212 may initiate communication with the second wireless headset 222 by, for example, sending a call request to the second wireless headset 222.

20

When the second wireless headset 222 receives such a request for communication from the first wireless headset 212, the second wireless headset 222 may automatically establish communication with the first wireless headset
25 210 to allow the users of the first and second headsets 221, 222 to communicate directly.

Alternatively, the second wireless headset 222 may require consent from its user before establishing
30 communication with the first wireless headset 212. For example, the second wireless headset 222 may transmit a

P045/GB/Sen/Brown

- 12 -

- signal to the second subscriber unit 220, on receipt of which the second subscriber unit 220 displays the ID/name of the first wireless headset 212 or user. It is also envisaged that the second wireless headset 222 may
- 5 further provide an audible signal to its user to alert the user of a request to communicate. The user may then accept or decline the request by interacting with a user interface on the second subscriber unit 220.
- 10 A corresponding signal may then be transmitted from the second subscriber unit 220 to the second wireless headset 222. If the user has accepted the request for communication, then the second wireless headset 222 will establish communication with the first wireless headset
- 15 212. Alternatively, if the user has declined the request for communication, the second wireless headset 222 may transmit a corresponding 'declining' message to the first wireless headset 212.
- 20 When the user of either of the first or second wireless headsets 212, 222 wishes to terminate communication, that user can initiate termination of the communication via the subscriber unit 210, 220. When the respective user wishes to terminate communication, the subscriber unit
- 25 210 or 220 preferably transmits an instruction to the headset 212, 222 instructing it to end communication. On receipt of this instruction the headset 212, 222 may transmit a signal to the other headset informing it that it is terminating communication, or alternatively the
- 30 headset 212, 222 may simply terminate communication.

P045/GB/Sen/Brown

- 13 -

Preferably the headset 212 is configured to be capable of establishing communication with a plurality of headsets, to allow for a group communication between three or more users of headsets. Furthermore, it is envisaged that
5 where group communication is supported a user is able to broadcast to all wireless headsets within range of its wireless headset.

In the illustrated embodiment, the wireless headsets are
10 used in conjunction with subscriber units. It is within the contemplation of the present invention that the wireless headsets may alternatively be used in conjunction with fixed line telephone systems, for example in a call centre. In this case, the ID of each
15 headset may be, for example, the extension number of the telephone terminal being utilised by an operator.

During a call, the user of the first subscriber unit 210 utilises the headset 212 for hands-free functionality.
20 If the user of the first subscriber unit 210 wishes for the user of the second wireless headset 222/second subscriber unit 220 to be included in the call, it is preferably given the option of communicating with the second wireless headset 222, either directly or via the
25 first wireless headset 212.

According to a further aspect of the preferred first embodiment of the present invention, it is envisioned that the users of the first and second subscriber units
30 210, 220 may switch between communication technologies. For example, let us assume that if the users of

P045/GB/Sen/Brown

- 14 -

subscriber units 210, 220 are communicating via a GSM network, and utilising the wireless headsets 212, 222 for hands-free functionality. Let us further assume that the wireless headsets 212, 222 subsequently come into close spatial proximity with one another during their phone call, such that the subscriber units and/or headsets detect one another's presence. In such a case, it is envisaged that the subscriber units utilising the detection means in the respective subscriber unit or headset will indicate as such to the users.

The users may then switch from communicating over the GSM network to direct wireless communication using the short range RF functionality of the headsets. Alternatively, the subscriber units and/or headsets may automatically switch from communicating over the GSM network to direct communication. In order to limit interference, it is envisaged that this short-range wireless communication between a subscriber unit and a non-associated headset (or two or more headsets) may utilise alternative communication technologies, such as a spread-spectrum frequency-hopping scheme.

Furthermore, it is envisaged that a headset being used in conjunction with a subscriber unit, as in the first preferred embodiment, may be capable of communicating with a headset used in conjunction with a fixed line telephone system or a computer system.

It is also envisioned that the wireless headsets may be used in conjunction with devices other than typical

P045/GB/Sen/Brown

- 15 -

wireless communications devices, for example a computer system of even a personal digital assistant (PDA). An example of such an arrangement is illustrated in FIG. 3.

- 5 In FIG. 3, a plurality of wireless headsets 330, according to a second embodiment of the present invention, are coordinated by a computer system 332. The computer system 332 includes or is connected to a transceiver 334 and antenna 336 for wireless
- 10 communication 215, 225 with a plurality of wireless headsets 330. One application of such communications from a central control to a number of wireless headsets would be for broadcast or dispatch communications.
- 15 A further envisaged application for this embodiment would be within an office or building that has a phone system based on an exchange which routes calls to say, a computer instead of to a telephone. The computers would then be configured to communicate with the headsets.
- 20 Furthermore, this application could make use of a local area network (LAN), rather than individual phone lines.

- A yet further application of the inventive concepts hereinbefore described is that, instead of the headsets
- 25 being used for telephone calls, the headsets are used for voice recognition by the computer, as well as for inter-headset communication.

P045/GB/Sen/Brown

- 16 -

It will be understood that the wireless headset communication arrangement, as described above, provides both:

- 5 (i) The functionality of a hands-free headset when operably coupled to, and solely communicating with, its associated communication device; and
- (ii) The functionality of inter-headset communication, between a plurality of communication units, in a single headset apparatus.
- 10 (iii) A communication can take place, or be initiated, using a short range RF link, rather than use the usual system transmission and bandwidth that utilises valuable resource that
- 15 creates undesirable interference, particularly in highly populated areas.

Whilst the specific and preferred implementations of the embodiments of the present invention are described above, 20 it is clear that one skilled in the art could readily apply variations and modifications of such inventive concepts.

Thus, an improved wireless headset communication 25 arrangement has been described wherein the aforementioned disadvantages associated with prior art arrangements have been substantially alleviated.

P045/GB/Sen/Brown

- 17 -

Claims

1. A wireless headset-based communication arrangement, comprising:
- 5 a subscriber unit;
- a wireless headset associated with said subscriber unit to form a wireless communication apparatus;
- the wireless headset-based communication arrangement
- 10 characterised by:
- detecting means within the wireless communication apparatus to detect a spatial proximity of at least one second subscriber unit or second wireless headset; and
- in response to said detection, said subscriber
- 15 unit or said wireless headset associated with said subscriber unit is adapted to communicate directly with said at least one second subscriber unit or second wireless headset.
- 20 2. The wireless headset-based communication arrangement according to Claim 1, further characterised by said direct communication being a short-range wireless communication.
- 25 3. The wireless headset-based communication arrangement according to Claim 1 or Claim 2, further characterised by said at least one second subscriber unit or second wireless headset being a plurality of subscriber units or wireless headsets such that group
- 30 communications are implemented between said subscriber unit or said wireless headset associated with said

P045/GB/Sen/Brown

- 18 -

subscriber unit and the plurality of subscriber units or wireless headsets.

4. The wireless headset-based communication
5 arrangement according to Claim 3, wherein said subscriber unit or said wireless headset associated with said subscriber unit provides broadcast communication to any of the plurality of subscriber units or wireless headsets within range of subscriber unit or said wireless headset
10 associated with said subscriber unit.

5. The wireless headset-based communication arrangement according to any of the preceding Claims wherein an identification is associated with the at least
15 one second subscriber unit and the first subscriber unit uses the identification to communicate with the at least one second subscriber unit or its associated headset.

6. The wireless headset-based communication
20 arrangement according to any preceding Claim, wherein said detecting means is contained within said subscriber unit or said wireless headset.

7. The wireless headset-based communication
25 arrangement according to any preceding Claim, wherein said detecting means detects a presence of a proximal at least one second subscriber unit or associated wireless headset when within the order of ten metres of said detecting means.

30

P045/GB/Sen/Brown

- 19 -

8. The wireless headset-based communication arrangement according to any preceding Claim, wherein said subscriber unit is one of: a cellular telephone, a mobile or portable radio, a personal digital assistant, and a computer.

9. A wireless headset adapted to operate in the arrangement of any of the preceding Claims.

10. A communication device adapted to operate in the arrangement of any of preceding Claims 1 to 8.

11. A wireless headset comprising a transmitter and a receiver for communicating with its associated communication unit in a first mode of operation, the wireless headset characterised by a processor for selecting a second mode of operation of the wireless headset to communicate directly with one or more alternative communication units or wireless headsets of said alternative communication units.

12. The wireless headset according to Claim 11, wherein the wireless headset is further characterised by detection means operably coupled to the processor, and said second mode of operation is selected by the wireless headset based upon a spatial proximity of said one or more alternative communication units or wireless headsets of said alternative communication units as determined by the detection means.

30

P045/GB/Sen/Brown

- 20 -

13. A wireless headset-based communication arrangement substantially as hereinbefore described with reference to, and/or as illustrated by, FIG. 1, FIG. 2 or FIG.3 of the accompanying drawings.

5

P045/GB/Sen/Brown

- 21 -

WIRELESS HEADSET COMMUNICATION**Abstract**

5 A wireless headset-based communication arrangement (200, 300), includes a subscriber unit (210); a wireless headset (212) associated with said subscriber unit (210) to form a wireless communication apparatus; and detecting means within the wireless communication apparatus to
10 detect a spatial proximity of at least one second subscriber unit (220) or second wireless headset (222). In response to said detection, said subscriber unit (210) or said wireless headset (212) associated with said subscriber unit (210) is adapted to communicate directly
15 (230) with said at least one second subscriber unit (220) or second wireless headset (222).



One advantage of the present invention is that the functionality of a hands-free headset and the
20 functionality of inter-headset communication are combined into a single headset apparatus.

(FIG. 2 to accompany abstract)

This page blank (uspto)

P045/GB/Sen/Brown

1/3

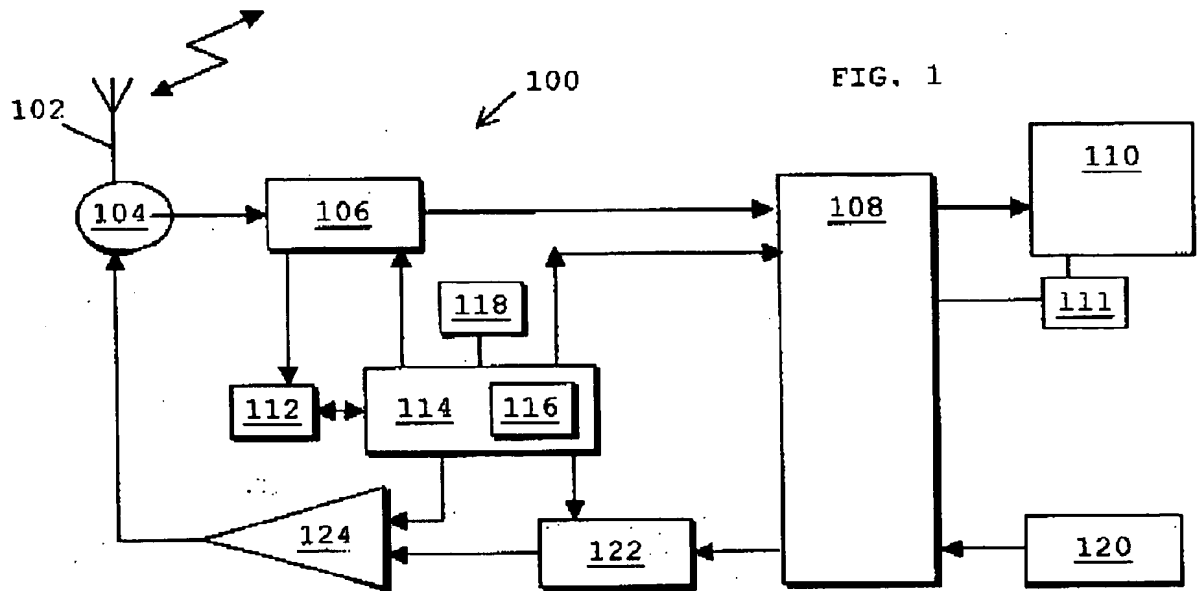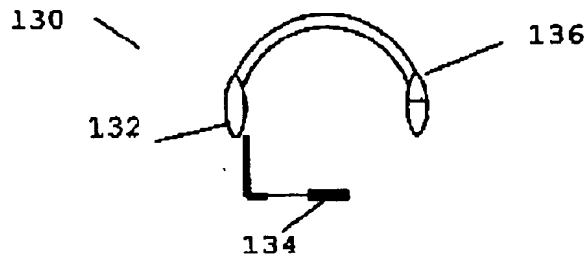


This Page Blank (uspto)

P045/GB/Sen/Brown

2/3

FIG. 2

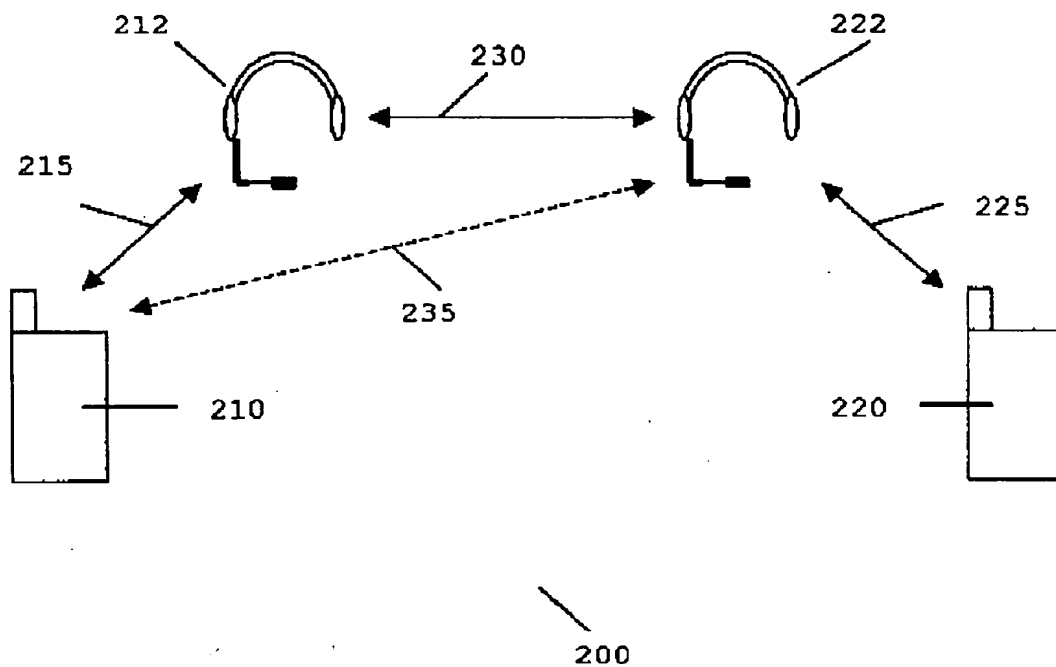


This Page Blank (uspto)

P045/GB/Sen/Brown

3/3

FIG. 3

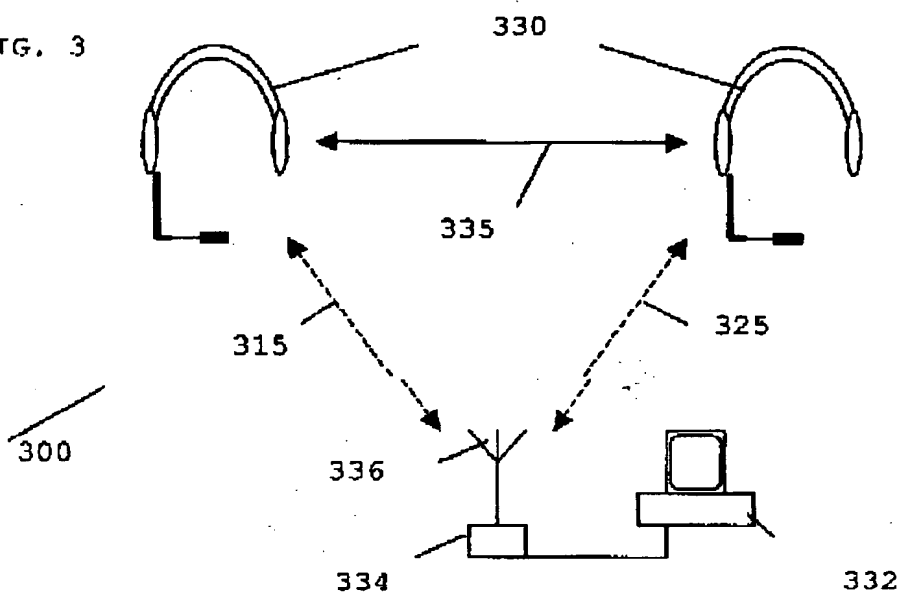



1/21/03

This Page Blank (uspto)